

## DEUTZ POWER SOLUTION



# DPS 25

## ► Specifications

### Genset model

Rated speed	rpm	1800
Net Frequency	Hz	60
Rated voltage 3 phases	V	480/277
Rated apparent power (PRP) 3 phases	kVA	25,0
Rated apparent power (LTP) 3 phases	kVA	27,0
Nominal current (LTP) 400V - 3 phases	A	31,99

### Engine

Make		DEUTZ
Model		F3M2011
Exhaust Emission Standard	Stage	II
Rated PRP gross power	kW	23,3
Rated LTP gross power	kW	24,5
Cooling system		oil
Speed governing		mecanical
Governing Standard		G2
Number of cylinders		3
Engine configuration		IL
Displacement	ltr	2,3
Bore/Stroke	mm	94/112
Compression Ratio		19
Electrical equipment	V/dc	12

### Air

Max. Intake depression ( Switch setting )	[mbar]	20
Combustion Air Volumne	[m³/h]	86

### Exhaust System

Max. exhaust Gas Temperature	[C°]	611
Max. Exhaust back pressure	[mbar]	30
Exhaust Gas Flow (at above temperature)	[m³/h]	236

### Cooling System

Standard Cooling System		
Fan Power Consumption	[kW]	0,4
Cooling Air Flow	[m³/h]	1800
Air Pressure Loss	[mbar]	1,5
Heat dissipation (convection)	[kW]	-

### Lube Oil System

Lube Oil Capacity (Slump)	[LTR]	5,5
Min Oil Pressure ( Shutdown)	[bar]	1,5

## Fuel Consumption

25% Load	306	[g/kWh]	2	[LTR/Hour]
50% Load	246	[g/kWh]	3,2	[LTR/Hour]
75% Load	236	[g/kWh]	4,7	[LTR/Hour]
100% Load	255	[g/kWh]	6,7	[LTR/Hour]
Fuel Filter	Spin-on Fuel Filter			
Optional	Pre-Filter w/ Water Separator			

## Noise Level ( Open / Canopy )

Sound pressure - 100% load, 7m average	dBA	67
--	-----	----




## Generator

Make	Mecc Alte		
Model	ECP28-M4A		
Generator efficiency	%	89,3	

## Controller




DEUTZ MODEL DESCRIPTION	CLASSIC	BASIC	COMFORT	DELUXE
<b>FEATURES</b>				
Binary Inputs / Outputs	6/6	4/6	7/7	8/8
Analog Inputs	3	3	3	4
Input & Output Configurations	✓	✓	✓	✓
D+ battery charging alternator circuit	✓	✓	✓	✓
Generator protections	✓	✓	✓	✓
AMF / MRS Functions	✓	✓	✓	✓
GCB/MCB Control with Feedback	✓	without feedback	✓	✓
Frequency measurement Gens/Mains	✓	✓	✓	✓
ECU support via CAN	✓	✓	✓	✓
kW / kWh / kVA measurement	kVA	Kw/Kwh/kVA	Kw/Kwh/kVA	Kw/Kwh/kVA
Magnetic pickup	x	✓	✓	✓
RTC / Battery	x	x	✓	✓
Total Fuel Consumption	x	x	✓	✓
Dummy Load / Load Shedding	x	x	✓	✓
Analog Calibration	x	x	✓	✓
Auto.Temperature based on heating & cooling	x	x	✓	✓
PLC	x	x	x	✓
Modbus support / SNMP support	x	x	○	✓
SNMP traps	x	x	x	○
Remote Control	x	○	○	○
Earth fault current protections	x	x	○	○
Manual Speed Control (For ECU Engines)	x	x	x	✓
2 x 10 A binary output for cranking and fuel solenoid	x	x	x	✓
Fuel pump	x	x	x	✓
Connection type autodetect	x	x	x	✓
TIER 4 Final Support	x	x	x	✓

-  Included
-  Excluded
-  Optional - Plug in



## Weight and dimensions

		open	canopy
Weight	kg	440	620
Length	mm	1300	2000
Width	mm	680	900
Height	mm	1300	1300
<b>Fuel tank capacity (option)</b>	ltr	35	90

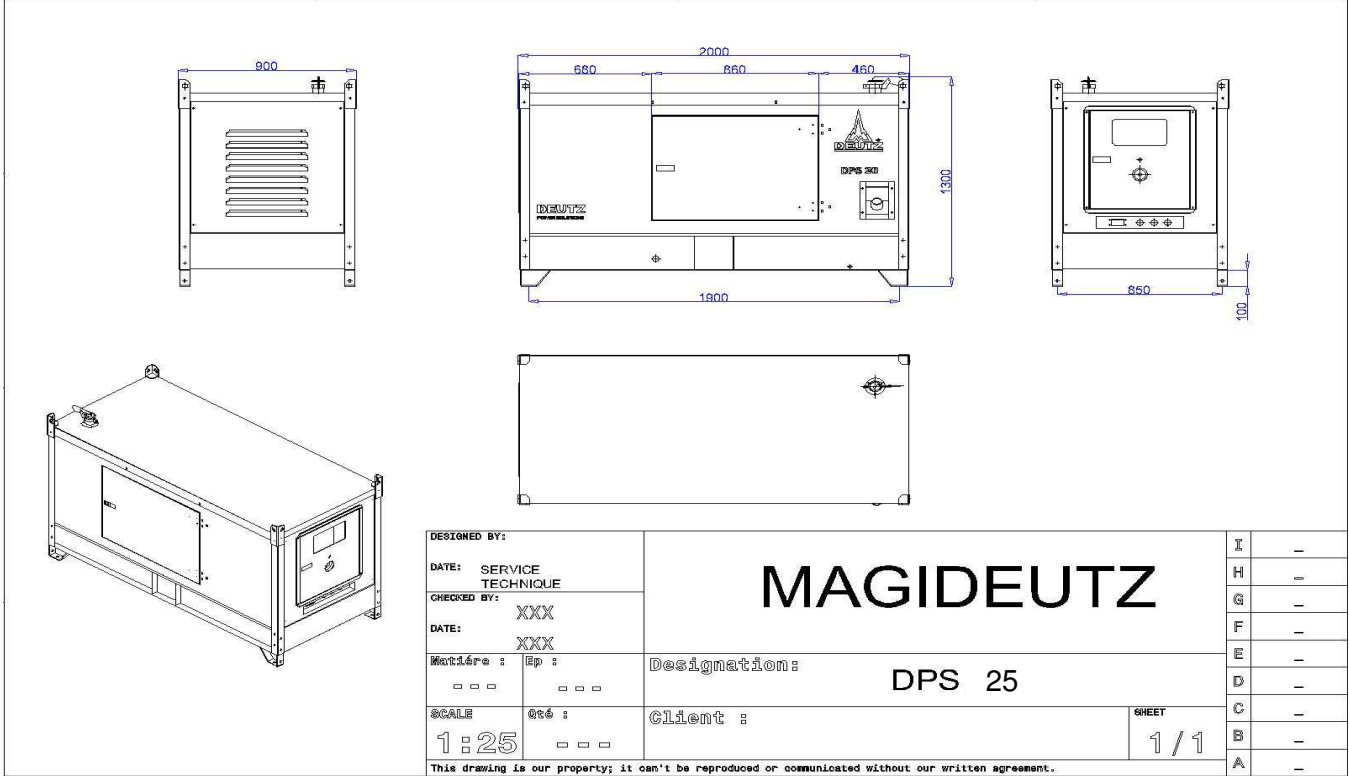

### **Cowling and soundproofing:** According to international standards

- The inner walls of the cowling: pulverized antiresonant material
- Doors and hatches: Sealed with rubber and foam join resists heat
- All steel supports: sandblasted and degreased covered:
  - \* A first layer of epoxides
  - \* Two coats of synthetic paints

### **Coupling**

The engine and alternator are coupled together and form a single piece by a semi elastic device.  
The coupling system is specially designed piece, flywheel housing.  
The system provides constant perfect alignment and allow a simple and easy maintenance

### **Chassis**

The frame is steel, generously sized, fully welded to the arc and absolutely rigid to support the complete generator with all accessories, coupled to the generator. Electrically welded which will be installed the engine and alternator through the insulating elastic soles vibration fixed with galvanized bolts and washers.  
The motor generator will be rigidly fixed flanges with a piece of semi elastic coupling

### **Painting**

The painting is of high quality and made of metalized  
2 primer and 2 topcoats for all components and accessories of the generator.

مؤسسة شذى نجد للتجارة

الموزع العام لمولدات دويتز الألمانية في المملكة العربية السعودية واليمن والعراق  
المملكة العربية السعودية الرياض هاتف: 0114816587 فاكس: 0114816096

[www.shatha.org](http://www.shatha.org)

