DEUTZ POWER SOLUTION





Specifications

rpm	1800
Hz	60
V	480/277
kVA	36,0
kVA	38,0
A	46,22
	DEUTZ
	F4M2011
Stage	II
kW	33,5
kW	35,2
	oil
	mecanical
	G2
	4
	IL
ltr	3,11
mm	94/112
	19
V/dc	12
[mbar]	20
[m³/h]	122
[C°]	599
[mbar]	30
[m³/h]	337
[kW]	0,4
[m³/h]	1800
	1,5
[kW]	-
	2,1
[bar]	1,5
	Hz V kVA kVA A Stage kW kW ltr mm V/dc [mbar] [m³/h] [C°] [mbar] [m³/h]

Fuel Consumption				
25% Load	292	[g/kWh]	2,7	[LTR/Hour]
50% Load	238	[g/kWh]	4,5	[LTR/Hour]
75% Load	228	[g/kWh]	6,3	[LTR/Hour]
100% Load	241	[g/kWh]	8,9	[LTR/Hour]
Fuel Filter		Spi	n-on Fuel	Filter
Optional		Pre-Filter w/ Water Separtor		
Noise Level (Open / Canopy)				
Sound pressure - 100% load, 7m average	dBA	(67	
Generator				
Make		I	Mecc Alte	
Model			ECP28 VL	4A
Generator efficiency	%		89,0	
Controller				










DEUTZ MODEL DESCRIPTION	CLASSIC	BASIC	COMFORT	DELUXE
FEATURES				
Binary Inputs / Outputs	6/6	4/6	7/7	8/8
Analog Inputs	3	3	3	4
Input & Output Configurations	✓	✓	✓	✓
D+ battery charging alternator circuit	✓	✓	✓	✓
Generator protections	✓	✓	✓	✓
AMF / MRS Functions	✓	✓	✓	✓
GCB/MCB Control with Feedback	✓	without feedback	✓	✓
Frequency measurement Gens/Mains	✓	✓	✓	✓
ECU support via CAN	✓	✓	✓	✓
kW / kWh / kVA measurement	kVA	Kw/Kwh/kVA	Kw/Kwh/kVA	Kw/Kwh/kVA
Magnetic pickup	×	✓	✓	✓
RTC / Battery	×	×	✓	✓
Total Fuel Consumption	x	×	✓	✓
Dummy Load / Load Shedding	×	×	✓	✓
Analog Calibration	×	×	\checkmark	✓
Auto.Temperature based on heating & cooling	×	×	\checkmark	✓
PLC	×	×	×	\checkmark
Modbus support / SNMP support	×	×	0	✓
SNMP traps	×	×	×	0
Remote Control	×	0	0	0
Earth fault current protections	×	×	0	0
Manual Speed Control (For ECU Engines)	×	×	×	✓
2 x 10 A binary output for cranking and fuel solenoid	×	×	×	\checkmark
Fuel pump	×	×	×	\checkmark
Connection type autodetect	×	×	×	\checkmark
TIER 4 Final Support	×	×	×	✓





Weight and dimensions		open	canopy
Weight	kg	570	820
Length	mm	1500	2200
Width	mm	680	900
Height	mm	1300	1300
Fuel tank capacity (option)	ltr	75	100

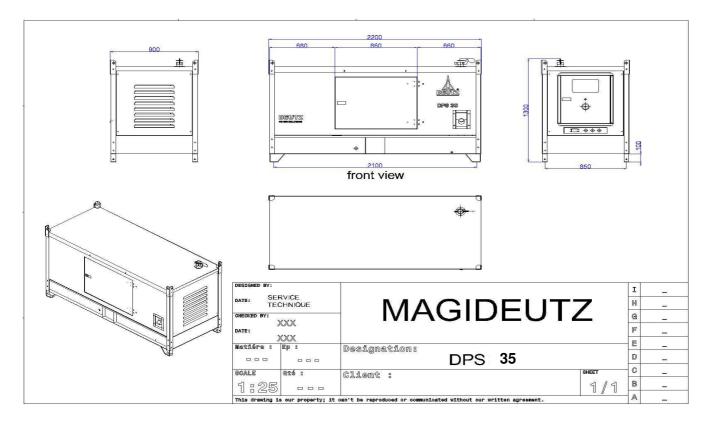

Cowling and soundproofing: According to international standards

- The inner walls of the cowling: pulverized antiresonant material
- Doors and hatches: Sealed with rubber and foam join resists heat
- All steel supports: sandblasted and degreased covered:
- * A first layer of epoxides
- * Two coats of synthetic paints

Coupling

The engine and alternator are coupled together and form a single piece by a semi elastic device.

The coupling system is specially designed piece, flywheel housing.

The system provides constant perfect alignment and allow a simple and easy maintenance

Chassis

The frame is steel, generously sized, fully welded to the arc and absolutely rigid to support the complete generator with all accessories, coupled to the generator. Electrically welded which will be installed the engine and alternator through the insulating elastic soles vibration fixed with galvanized bolts and washers.

The motor generator will be rigidly fixed flanges with a piece of semi elastic coupling $% \left(1\right) =\left(1\right) \left(1\right)$

Painting

The painting is of high quality and made of metalized 2 primer and 2 topcoats for all components and accessories of the generator.

